









Fire Resistance

Class A:ASTM E84
Bf1-s1:EN13501-1
BAL 29:AS 1530.8.1-2007



Termite Resistance
Reticulitermes santonensis
DC D(durable)
[EN 117]



Hard & Durable

Brinell > 9.5Kg/mm2 [EN1534], harder than any other hardwood.

Durability: Class 1 [CEN/TS 15083-1: 2005][EN 350: 2016]



Stable & Precise

Swelling Rate in Length 0.1%
(no head side gap between boards)

Swelling Rate in Width 0.6%
[DIN EN 15534-1]

dasso is the owner of fused bamboo processing technology and patent, and has been protected by technology patent in many countries.

Europe 2269788 / United States US870958B2 / China ZL200810093764.4

















certified material





dassoXTR dassoCTECH for Exterior Use

Through its patented "heat treatment" technology, dasso processes bamboo into dassoXTR for exterior use in classic "Espresso" color; With the application of Ceramix Technology, dassoCTECH exterior materials have wonderful performance outdoor while retaining the original color - Cognac. Both dassoXTR and dassoCTECH can be processed into decking, cladding, soffit, fence, lumber and panel, which are widely used in commercial and residential projects.












Club at Shanghai China

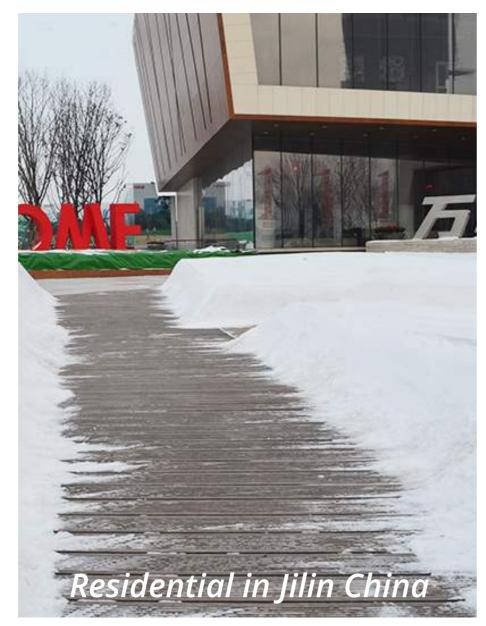







About dasso

Dasso group, founded in 1993, is the global leader and innovator of the bamboo industry. With over 27 years' history of the bamboo products production, now we have 8 manufacturing facilities and over 1000 employees, in addition to owning over 2,700 acres of productive, sustainable bamboo forest in China.